

ENCLOSURES

OLYMPIAN™



CAE – SOUND ATTENUATED WEATHERPROOF ENCLOSURE FOR GAS GENERATOR SETS

G12U3–G25F3
G10U3S–G25F3S

These weatherproof, sound attenuated, factory designed and installed enclosures are of rugged construction and sound attenuated down to extremely quiet levels. They incorporate internally mounted silencers for safety and aesthetic value. Modular design principles utilize many interchangeable components permitting on-site repair.

FEATURES

ROBUST/HIGHLY CORROSION RESISTANT CONSTRUCTION

- Black zinc die cast hinges tested and proven to withstand extreme conditions of corrosion
- Zinc plated or stainless steel fasteners
- Body made from steel components treated with polyester powder coating

EXCELLENT ACCESS FOR MAINTENANCE

- Large cable entry area for installation ease
- Large " lift off" doors located convenient to controls and interior service areas for easy access to control panel, circuit breaker and engine/generator
- Vertically hinged doors allow full 180° opening rotation
- Lube oil and coolant drains piped to edge of enclosure and terminated with drain valves

SECURITY AND SAFETY

- Exhaust silencing system totally enclosed for operator safety
- Roof outlet exhaust with roof aperture and rain cap
- Lockable access doors
- Cooling fan and battery charging alternator fully guarded
- Emergency stop push button (red) mounted flush on exterior enclosure wall
- Stub-up cover for "rodent proofing"


TRANSPORTABILITY

- Lifting/drag points on baseframe

LEHF1347-05 (02-05)



WHERE THE WORLD TURNS FOR POWER

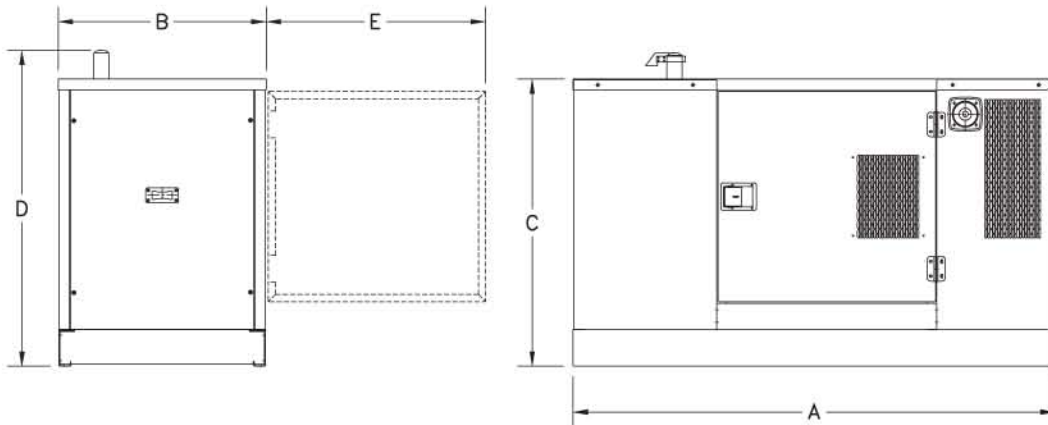

SOUND ATTENUATED WEATHERPROOF ENCLOSURES "K" SERIES DIMENSIONS AND WEIGHTS

Generator Set Model	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	Weight* lb (kg)
G12U3	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (890)	1179 (535)
G15U3	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (890)	1230 (560)
G20UH3	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (890)	1197 (543)
G25UH3	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (890)	1241 (563)
G20F3	77.6 (1970)	33.5 (850)	47.2 (1200)	51.9 (1317)	35.0 (900)	1250 (567)
G25F3	77.6 (1970)	33.5 (850)	47.2 (1200)	51.9 (1317)	35.0 (900)	1327 (602)
G10U3S	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (900)	1179 (535)
G15U3S	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (900)	1235 (560)
G17.5UH3S	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (900)	1197 (543)
G25UH3S	77.6 (1970)	33.5 (850)	46.3 (1175)	50.9 (1292)	35.0 (900)	1241 (563)
G20F3S	77.6 (1970)	33.5 (850)	47.2 (1200)	51.9 (1317)	35.0 (900)	1327 (602)
G25F3S	77.6 (1970)	33.5 (850)	47.2 (1200)	51.9 (1317)	35.0 (900)	1349 (612)

*Net weight with lube oil and coolant, quoted for largest model in range.

SOUND LEVELS

Generator Set Model	1800 rpm (60 Hz)					
	50 ft (15 m)		23 ft (7 m)		3 ft (1 m)	
	No Load (dBA)	Full Load (dBA)	No Load (dBA)	Full Load (dBA)	No Load (dBA)	Full Load (dBA)
G12U3, G10U3S	54.6	55.8	60.7	61.9	72.1	72.8
G15U3, G15U3S	54.6	55.9	60.7	62.0	72.1	72.8
G20UH3, G17.5UH3S	67.5	67.5	73.6	73.6	84.3	84.5
G25UH3, G25UH3S	67.5	67.4	73.6	73.5	84.3	84.5
G20F3, G20F3S	54.8	58.1	60.9	64.2	70.9	74.5
G25F3, G25F3S	54.8	58.9	60.9	65.0	70.9	75.2

The sound pressure level data shown is quoted as free field and is for guidance only. Actual levels produced may vary according to site conditions.



PO Box 5047
BALTIMORE, MD 21220
P: 410.686.3120
F: 410.686.4271

www.CAT-ElectricPower.com

© 2005 Caterpillar
All rights reserved.
Printed in U.S.A.

WWW.NEVERINTHEDARK.COM

Marketing: N. America
LEHF1347-05 (02-05)

Materials and specifications are subject to change without notice.
The International System of Units (SI) is used in this publication.